



**플랜지 편락관** Flange Concentric Taper

규격	L	H
100 × 80A	200	220
200 × 150A	300	240
250 × 200A	300	400
300 × 250A	300	455

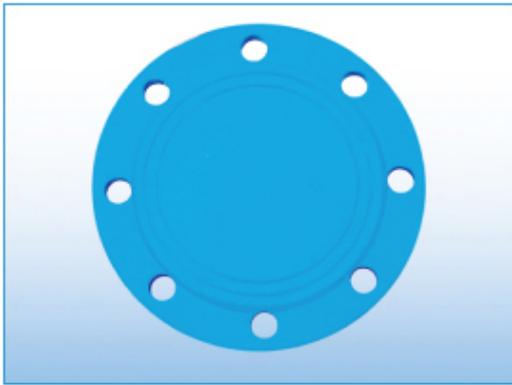


**마개 플랜지** Blank Flange

규격	L	H
80A	19	200
100A	19	220
150A	19	285
200A	20	340
250A	22	400
300A	24,5	455
350A	24,5	505
400A	24,5	565

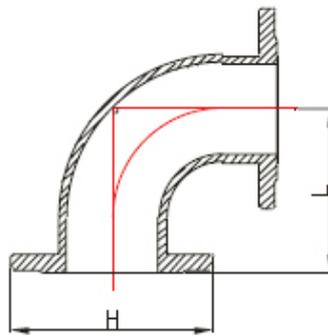


**90 플랜지곡관** 90 Flange Rounding

규격	L	H
80A	200	165
100A	220	180
100 × 80A	220	180

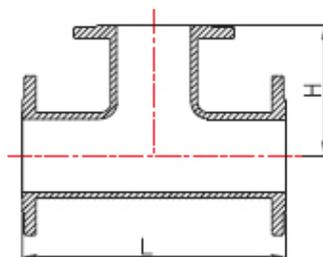


**플랜지 티** Flange Tee

규격	L	H
80A	165	330
100A	180	360
100 × 80A	175	360

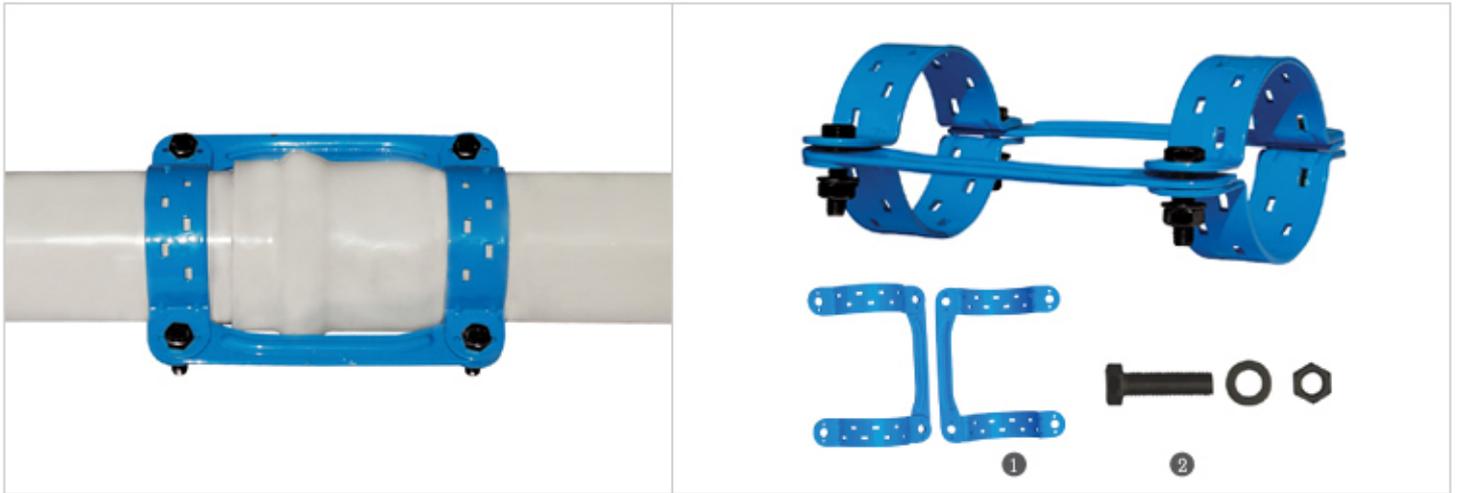

**구 성**

NO	부품명칭	구성수량	재 질	비 고
1	몸체	2	SS400, GCD450	에폭시 분체 도장
2	볼트, 너트, 와사	4SET	SS400	

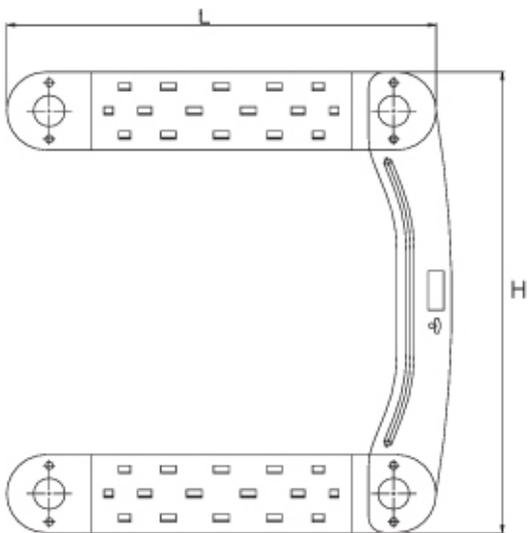

**규 격**

SIZE	L	H	부 트	
			규 격	수 량
50A	248	138	M12	4
65A	262	164	M12	4
75A	262	175	M12	4
100A	262	204	M12	4
125A	295	247	M18	4
150A	295	273	M18	4
200A	335	330	M12	8
250A	440	437	M18	8
300A	495	488	M18	8
350A	570	515	M18	8
400A	570	561	M18	8

2.png  
(771 X 767)



### 수압시험

규격	수압	누수	이탈
50A	2,5Mpa	없음	없음
75A	2,5Mpa	없음	없음
100A	2,5Mpa	없음	없음
150A	2,0Mpa	없음	없음
200A	2,0Mpa	없음	없음
250A	2,0Mpa	없음	없음
300A	2,0Mpa	없음	없음
350A	2,0Mpa	없음	없음
400A	2,0Mpa	없음	없음

## NHP Joint 스테인리스 새들 붙이 분수전



### 제품특징

1. 단수 없이 분기작업이 가능하며 시공이 간단하고 작업시간이 짧아 예산 절감이 가능하다.
2. 새들부 에폭시 분체 도장으로 부식에 강하며 반영구적이다.
3. 지수부는 스테인리스로 제작되어 부식에 강하며 인체에 무해하다
4. 적용 관종 (HI-VP, 강관, 주철관등)이 다양하다

규격		HI-VP, 강관용		주철관용	
새들부	지수부	새들부	지수부	새들부	지수부
40	15, 20	75	15, 20, 25, 30, 40		
50	15, 20	100	15, 20, 25, 30, 40, 50		
65	15, 20, 25	150	15, 20, 25, 30, 40, 50		
75	15, 20, 25, 30, 40	200	15, 20, 25, 30, 40, 50		
100	15, 20, 25, 30, 40, 50	250	15, 20, 25, 30, 40, 50		
150	15, 20, 25, 30, 40, 50	300	15, 20, 25, 30, 40, 50		
200	15, 20, 25, 30, 40, 50	350	15, 20, 25, 30, 40, 50		

3.png  
(777 X 962)